

—SUPTEC—
touchable innovation



Pos-PC, Periferiche e accessori

www.SUPTEC.it

SUP M92 W

SUP M92 A

SUP M 92	Data Sheet
CPU:	i5 10th, RK3288
OS	Windows 7/8/10, Linux; Android 7/11
MEMORY	DDR3-4G, DDR3-8G, DDR4-4G
Hard Disk	64GB, 128GB, 256GB, HDD500GB
Touch Screen	10 Points Capacitive Screen (15.6inch 16:9 1366*768/ 1920*1080)
MATERIAL	Aluminum Alloy



Alloggio per stampante



Sistema Windows



Sistema Android

SUP 1516 W

SUP 1516 A

SUP 1516 Data Sheet		
Motherboard	intel core i5 - 10 th generation CPU for option	ARM Cortex-A17 -RK 3588 quad core 1.8GHz CPU
System Memory	1*SO-DIMM DDRIII slot, support 1333*/1600 4GB (default) 2GB/8GB for option	On board 2GB DDRIII, 4GB for option
Storage device	Msata SSD 64GB or higher, up to 256GB	8GB eMMC, support 32GB TF card expanded
Audio	On board Real Tek ALC662 audio chip ALC5640	On board Real Tek audio chip ALC5640
LAN	10/100Mbps, Realtek RTL8111F Lan chip built in Mini PCI-E slot, support embedded WIFI module	10M/100M RTL8201F, 10M/100M/1000M RTL8211E for option
Operating System	Windows 7/8/10, Embedded, WEPOS, Linux	Android 11



Sistema Windows



Sistema Android




SUP S POS-105 TY

SUP S Pos-105 TY	Data Sheet
CPU	Intel i3 10th
MEMORY	1 x SO DIMM DDR3L 1067/1333MHz, 8GB
STORAGE	SSD 128 - GB
USB	2x USB 2.0 - 1x USB 3.0
COM	COM 1 / 2 : RS232, Rj50
RJ 45	LAN 1 x Gigabit Ethernet by RJ-45, support Wake on LAN
VFD	ON
	Wireless LAN module, half size mini PCIe type (Optional)
LCD	15" Capacitive Touch Screen



Monitor Touch - Lato Operatore

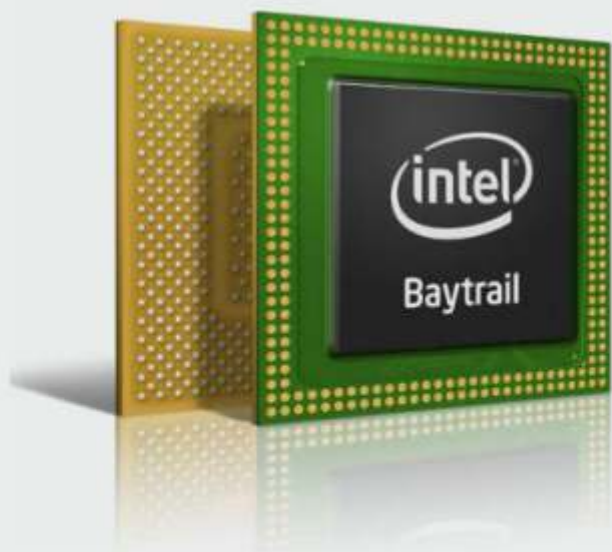

SUP POS-82 BI

SUP POS-82 BI	18.5" pos machine
Type	18.5" pos machine with aluminum alloy base
Display	18.5" LED display touch screen
Touch panel	G+G Capacitive & flat touch screen
Motherboard	Manufacturer-Seavo: Intel I5
Memory	Lanson: DDR3 8G
SSD	Longsys: SSD 128 G
Resolution	1366 * 768
Ports	1 x LAN 1 x COM 1 x 15 pin VGA female type 4 x USB 2.0 1 x Audio in port 1 x Audio out port
Packing side	1pc/ CTN. Size:54 * 31 * 52 cm. G.W.: 17kgs.



SUP 80350 C

SUP80350C		Data Sheet
Printing	Method Speed Resolution Width	Direct Thermal 250mm/sec 576dot/line or 512dot/line 72mm or 76mm
Memory	Buffer NV Flash	2048 KB 256 KB
Power supply	Adapter Cash drawer	Input: AC 110V/220V, 50-60Hz Output: DC24V/2.5AOutput: DC24V/1A
Language		Buyer language support
Emulation		ESC/POS command
Driver		Windows, Linux
Certification		CE,FCC,ISO9000,RoHS
Printer weight		1kg
Printer Size		18.5*14*13.8cm
PORTE		USB - LAN - RS 232



Retro e attacco periferiche



visione laterale

SUP 58 T4

SUP 58 T4 (2inch Thermal Printer)		Data Sheet
Printing	Method Speed Resolution Width	Direct Thermal 90mm/sec 203dpi(8dots/mm) max 48 mm
Memory	Buffer	Buffer 4KB,Flash 60KB
Power	Power supply Cash box Port	AC 110-220V, 50-60Hz DC 12V/3A DC 12V/1A
Life	Print Head Auto Cutter	AC 110-220V, 50-60Hz DC 12V/3A DC 12V/1A
Barcode & Character	1D Barcode	UPC-A/UPC-E/JAN13(EAN13)/ JAN8(EAN8)CODE39/ITF/ CODABAR/CODE93/CODE128
	2D Barcode	None
	Character	OEM437/Katakana/OEM850/ OEM860/OEM863/OEM865/ WestEurope/Greek/Hebrew/ EastEurope/Iran/WPC1252/ OEM866/OEM852/OEM858/ IranII/Latvian/Arabic/PT151,1251/ OEM747/WPC1257/Vietnam/ OEM864/Hebrew/WPC1255/Thai
	Font Size	Font A 12*24,Font B 9*17
Media	Paper Type Paper Width Roll Diameter Thickness	Thermal Paper Rolls 58mm Max.50mm 0.06~0.08mm
Physical	Dimensions Net Weight	225*140*130mm 0.94KG
PORTE		USB - BT



SUP TL 110 B

SUPTL110B (4inch Ribbon)		Data Sheet
Printing	Method Speed Resolution Width	Both Ribbon and Thermal 3-6 inch/sec 300dpi(12dots/mm) Max 104mm
Memory	Buffer	DRAM 4M,Flash 4M
Power	Power supply Cash box Port	AC 110-220V, 50-60Hz DC 24V/2.5A None
Life	Print Head Auto Cutter	AC 110-220V, 50-60Hz DC 12V/3A DC 12V/1A
Barcode & Character	1D Barcode	CODE128/EAN128/ITF/CODE39/ CODE93/ EAN13/EAN13+2/ EAN13+5/EAN8/EAN8+2/ EAN8+5/CODABA/POSTNET/ UPCA+2/UPCA+5/ UPCE+2/ UPC-E+5/UPC-E/UPCE+2/ UPC-E+5 CPOST/MSI/MSIC/ PLESSEY/ITF14/EAN14
	2D Barcode	QR code
	Ingrandisci o Rotazione	Ingrandimento da 1 a 10 volte in entrambe le direzioni, rotazione da 0 gradi o 90 gradi o 270 gradi o 360 gradi
	Graphic	Monochromatic PCX, BMP images etc.can be download into FLASH,DRAM
Media	Paper Type Paper Width Roll Diameter Thickness	Thermal Paper Rolls,Sticker 20-120mm 25mm~127mm 0.06~0.254mm
Ribbon	Material Outside Diameter Length Width	Wax Ribbon,Mixed Ribbon, Resin Ribbon Max.67mm Max.300m 110mm
Physical	Dimensions Net Weight	225*140*130mm 0.94KG
PORTE		USB - RS 232 - LAN



Retro e attacco periferiche



SUP LETTORE HR22 - USB

SUP 192 D-2R	Data Sheet
Fisiche	Profondità 94 mm Larghezza 67 mm Altezza 173 mm Peso 220 gr
Elettriche	Alimentazione 5V .DC Assorbimento 170mAh max
Interfaccia	USB
Caratteristiche	Sorgente di luce: LED Aimer 617nm, Bianco Area: 640x480 pix Angolazione: 360°,65°,55° Risoluzione: 5 mil. Contrasto 25% Scansione: Immagini Cmos Distanza di lettura: da 4 a 20 cm (in base alla risol.)
Operative	Cavo: 180cm Cavo dritto Connettore: USB Indicatori di lettura: Led, Buzzer
Ambientali	Protezione: Ip54 Caduta: 2mt su cemento Temperatura Operativa: -10° to 50° Temperatura Conservazione: -20° to 70° Umidità: 20% to 95% RH (non condensata)



SUP LETTORE HF-680

SUP HF - 680	Data Sheet
Peso: Larghezza: Profondità:	278 g 88 mm 85 mm
Alimentazione: Consumi: Consumi (modalità stand-by):	dC 2 W 0,85 W
Tecnologia di connessione: Interfaccia standard:	Cablato USB.
Caratteristiche	Honeywell HF680, Lettore codici a barre fisso, 2D, LED, 1280 x 800 Pixel,
Operative	cavo (USB, 1,5 m).



SUP V4-S

Processor	Intel Celeron J6412 (1.5MB Cache, up to 2.60 GHz)	
Memory	1*4GB, 2*DDR4 3200 SODIMM sockets, max. 32GB	
Storage	1*128GB(max.512GB) PCIe Gen3x4 NVMe M.2 2280 SSD, 1*SATAIII M.2 2242 expansion socket	
Display	15" 1024x768 LED-backlit TFT LCD	
Touchscreen	PCT (Projected Capacitive Touch)	
Operation system	Windows 10 IoT 64 bit	
Ext. I/O Ports, Audio & Power	I	II
LAN port	1*RJ45 (10/100/1000 Mbps)	
External Display port	1	
USB port	4*USB2.0, 2*USB3.0	
COM port	4*RJ48 (RS232)	3*RJ48 (RS232)
Cash drawer port	N/A	1*RJ11 (24V)
Audio port	1*3.5 mm TRRS (Line-out/Mic-In)	
Built-in speaker	2 (2W)	
Power	100~240V, 50/60Hz	
Customer display	AMON 10 / M15 series (Touch available) VFD 2*20 lines Display	



SSD removable



—SUPTEC—

www.SUPTEC.it

Pos-PC, Periferiche e accessori